

Fig. 1A

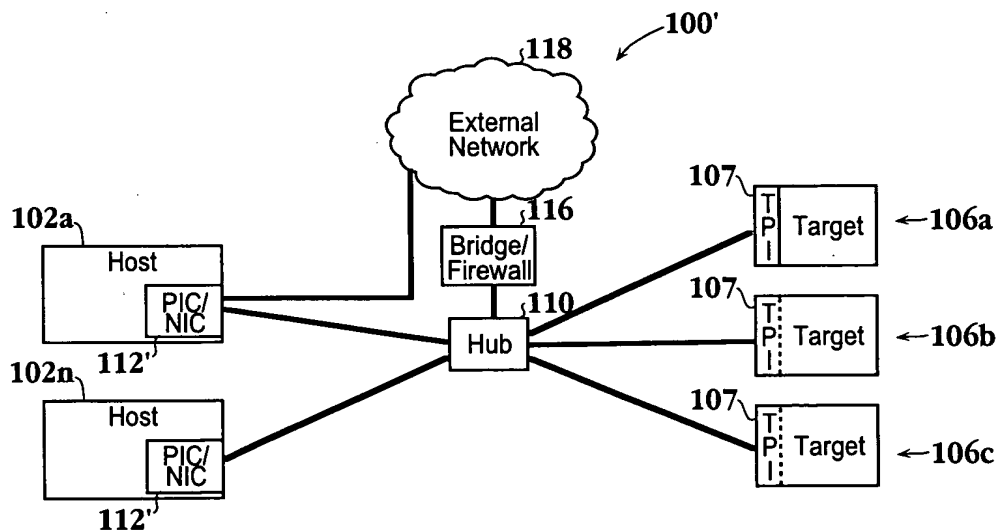


Fig. 1B

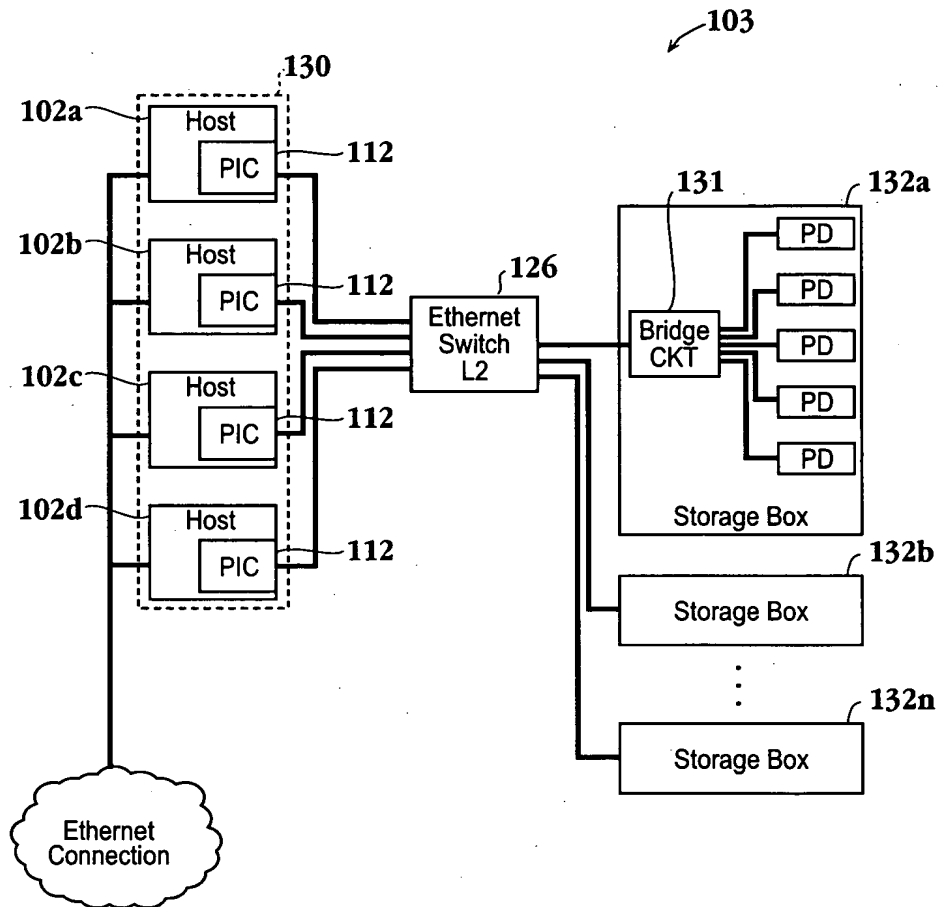


Fig. 1C

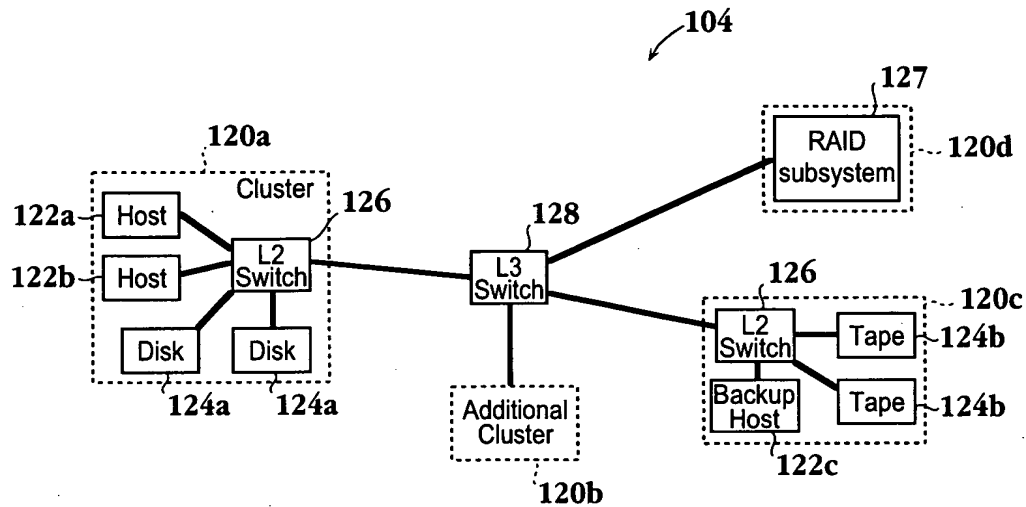


Fig. 1D

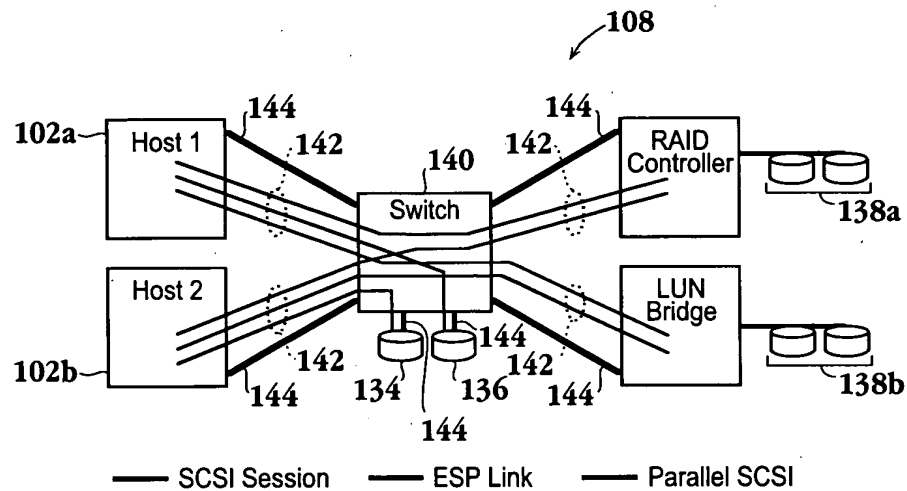


Fig. 1E

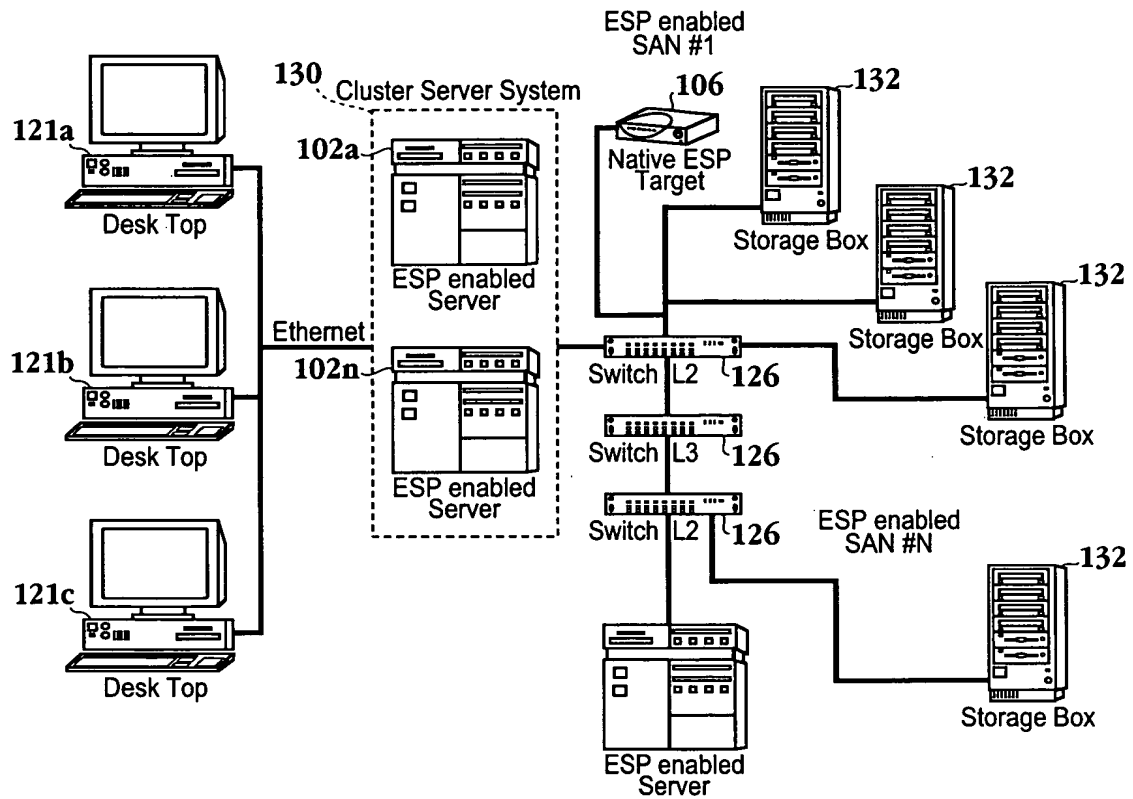


Fig. 1F

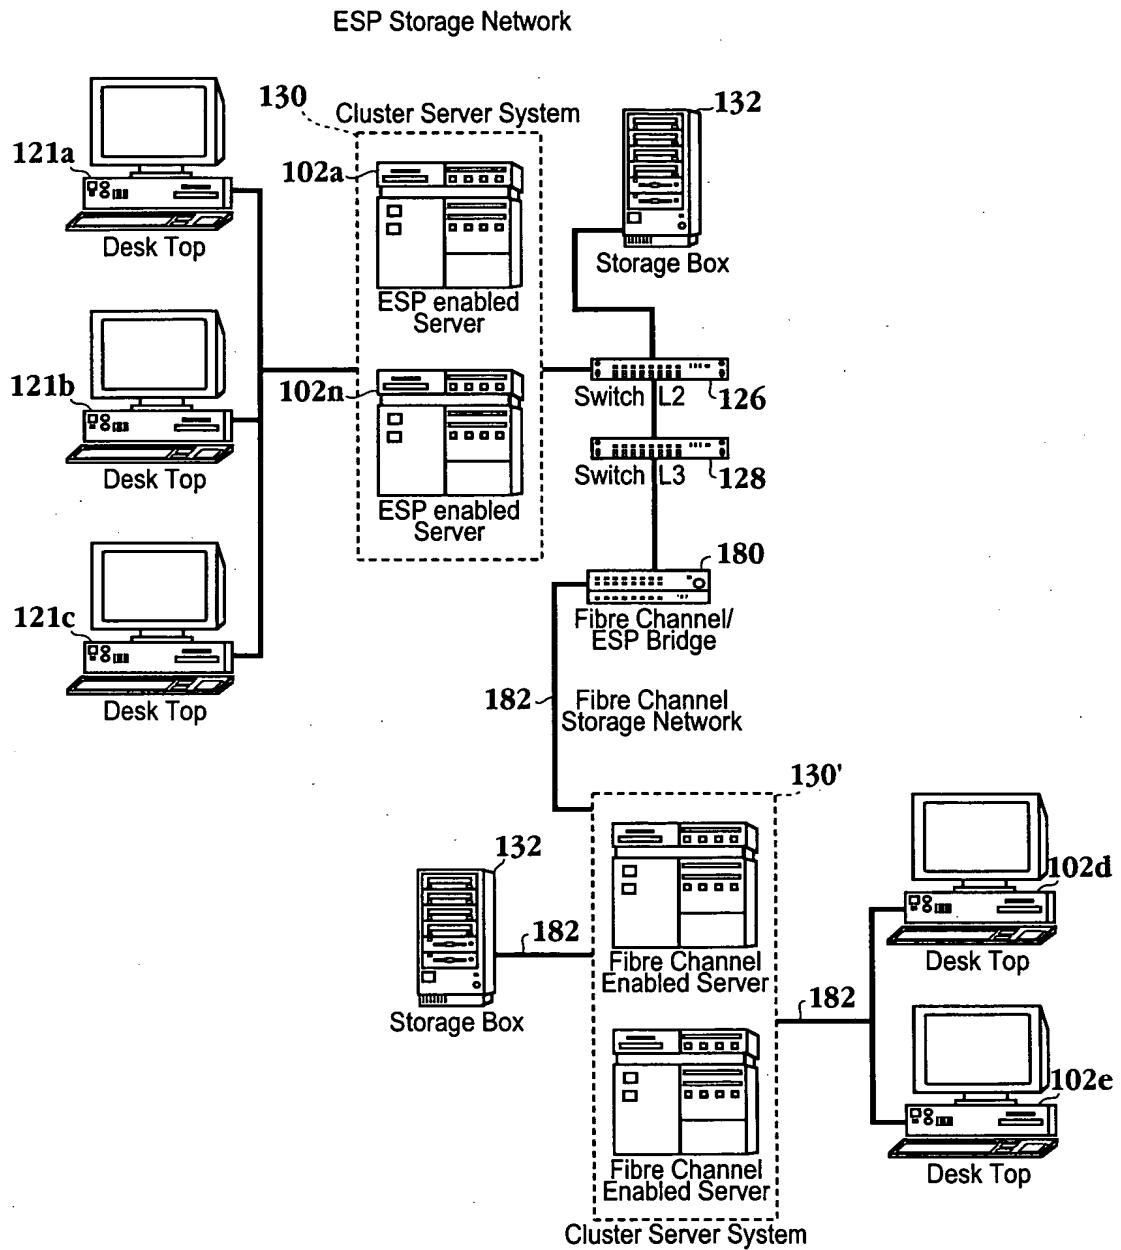


Fig. 1G

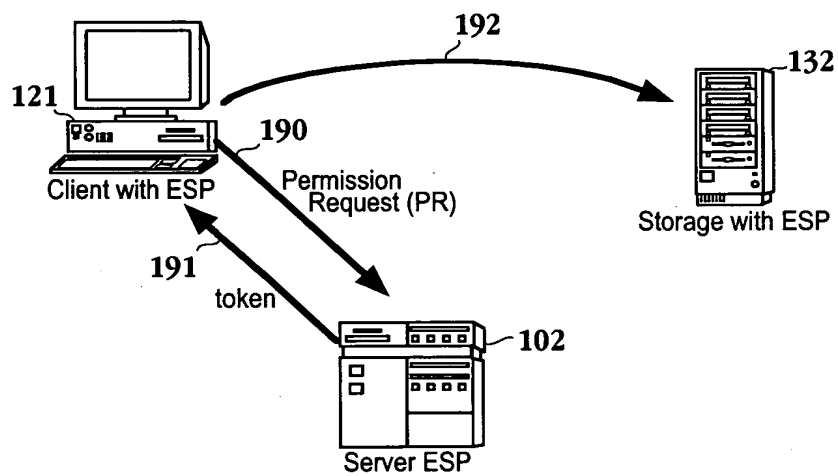


Fig. 1H

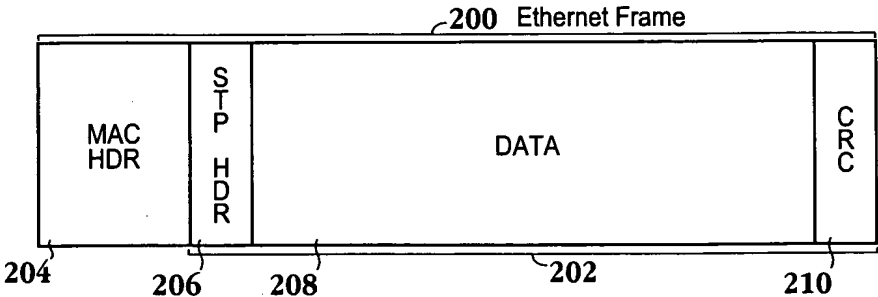


Fig. 2A

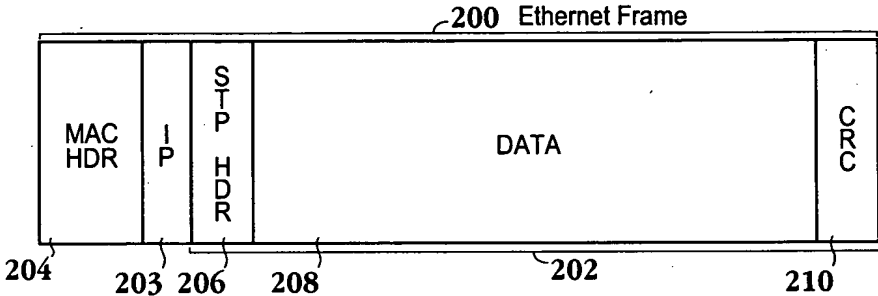


Fig. 2B

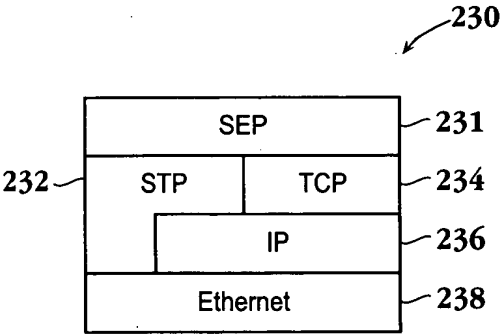


Fig. 2C

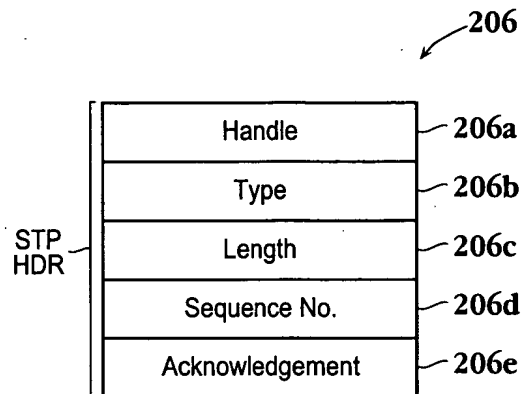


Fig. 3A

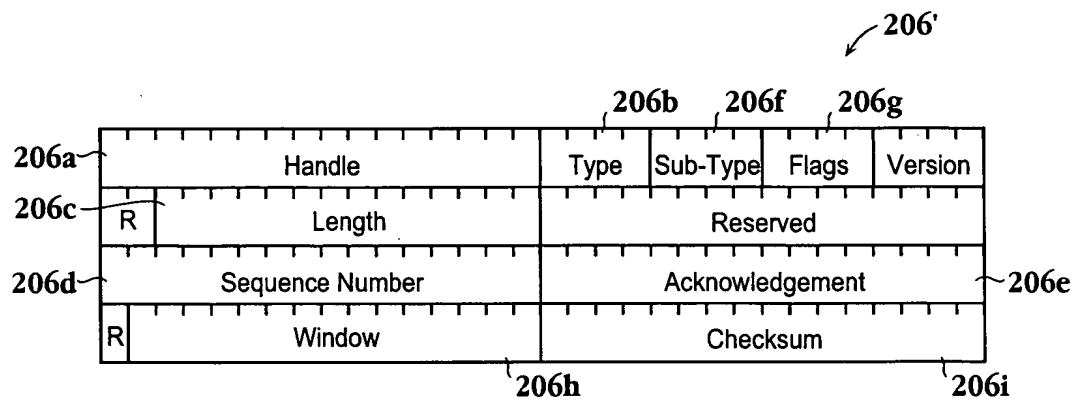


Fig. 3B

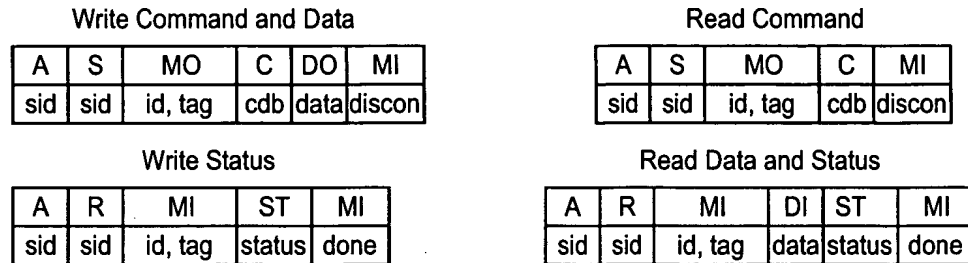


Fig. 4A

| SCSI Phase | Information Transferred |
|------------------------|-----------------------------|
| A – Arbitration Phase | sid – SCSI ID |
| S – Selection Phase | cdb – Command Data Block |
| C – Command Phase | data – Read or Write Data |
| MI – Message In Phase | status – Status |
| MO – Message Out Phase | id – Identify Message |
| DI – Data In Phase | tag – TAG Message |
| DO – Data Out Phase | discon – Disconnect Message |
| ST – Status Phase | done – Command Done Message |

Fig. 4B

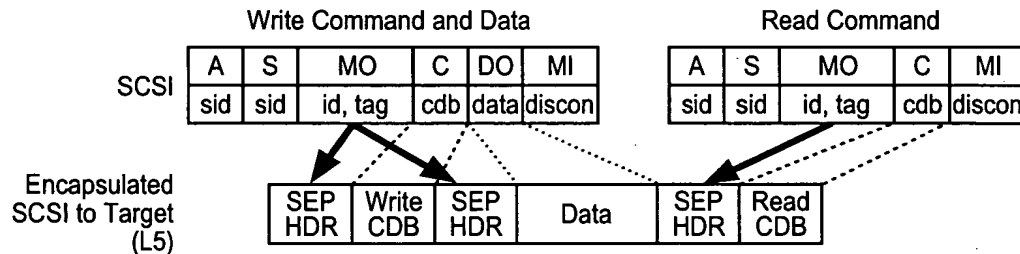


Fig. 4C

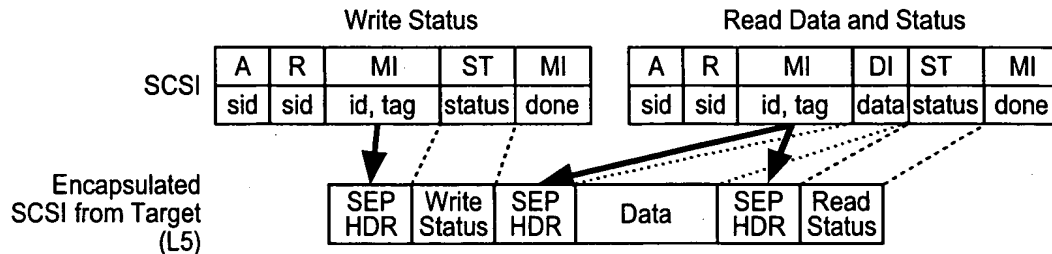


Fig. 4D

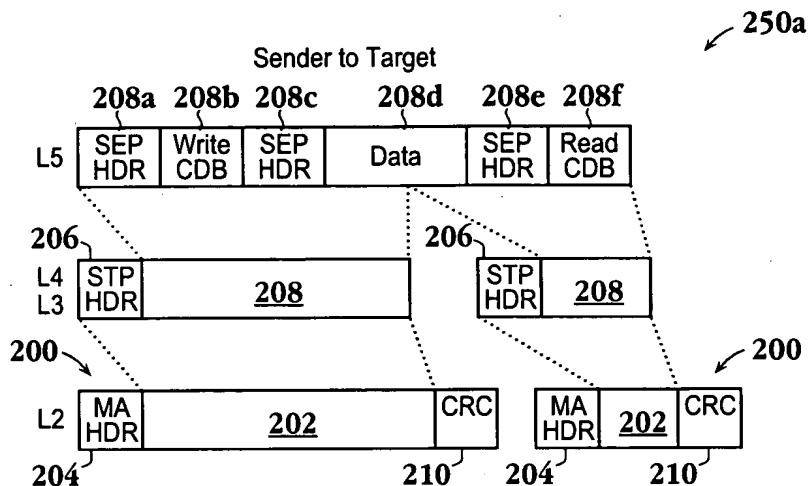


Fig. 4E

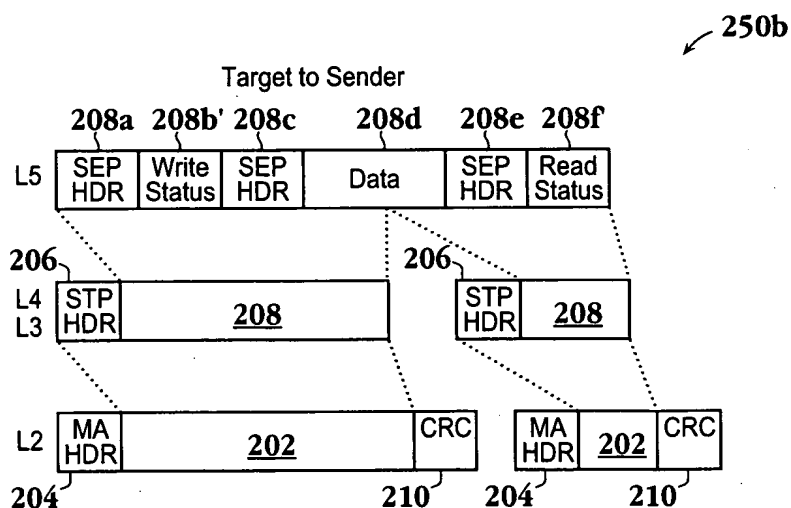


Fig. 4F

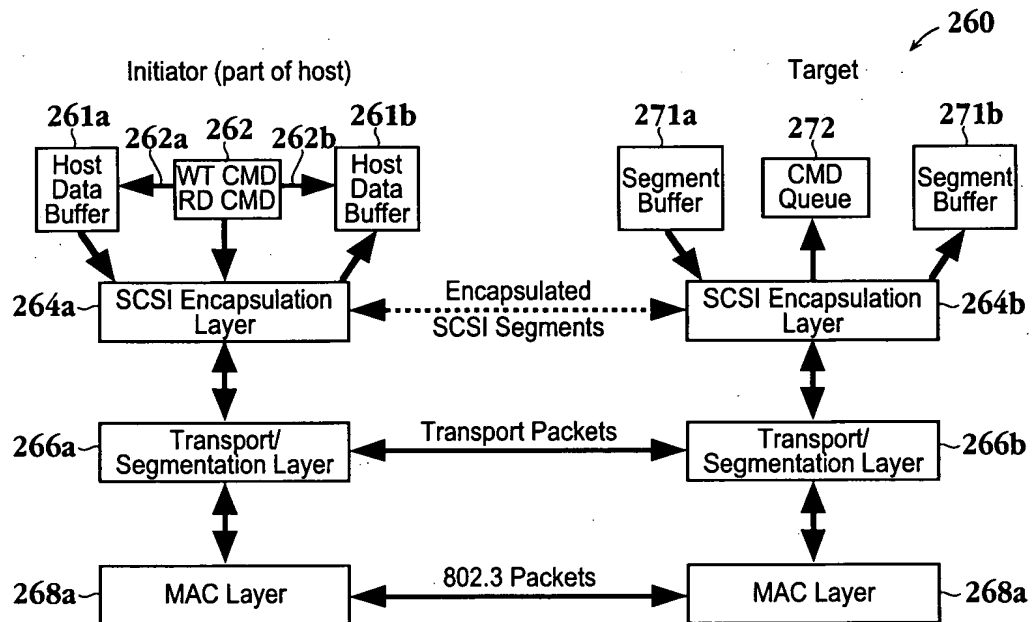


Fig. 4G

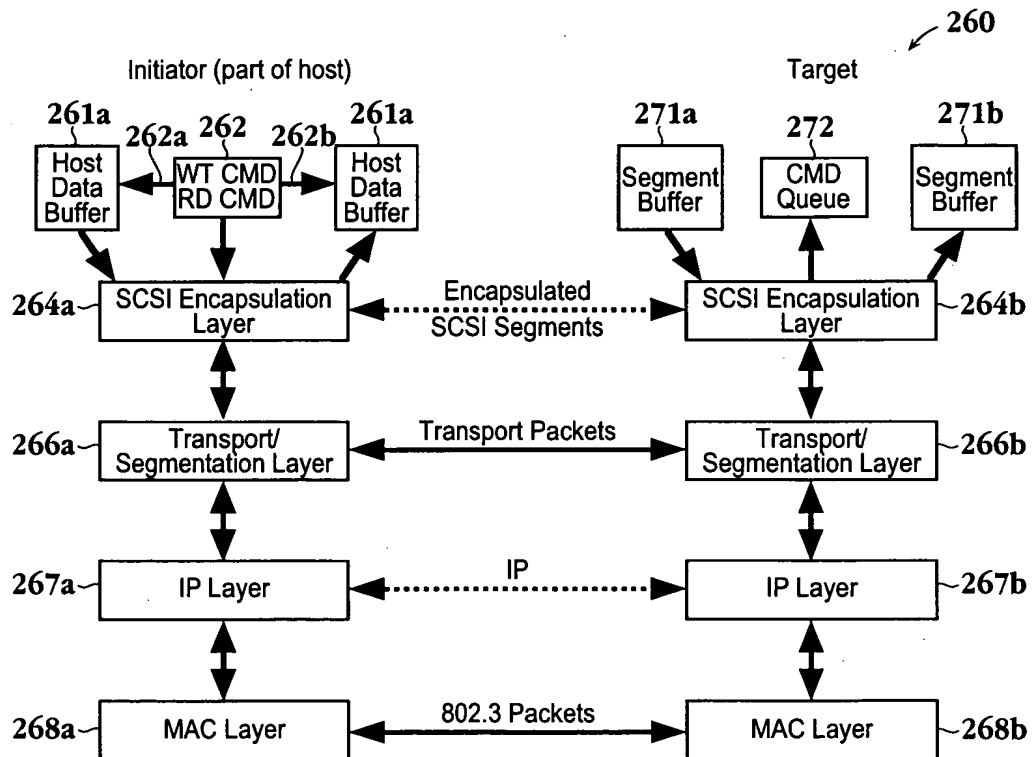


Fig. 4H

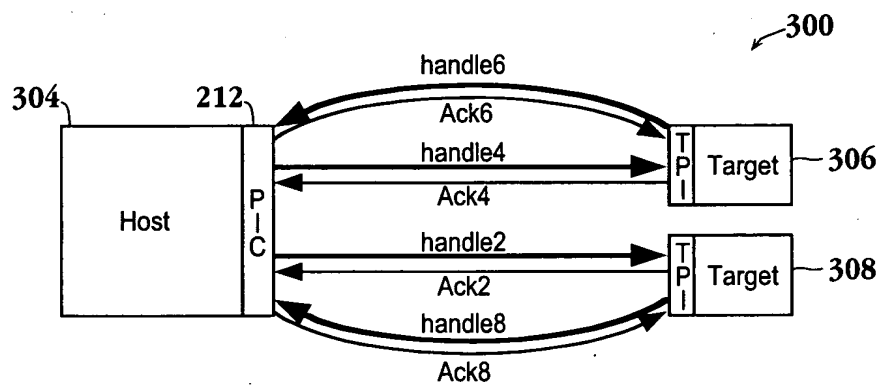


Fig. 5A

310

| | |
|------------------|--------------------------------|
| | Lookup Table |
| Connection Index | |
| | PIC-Target Connection 8 |
| 2 | Target MAC Addr. <u>306</u> |
| | |
| | PIC-Target Connection 6 |
| 4 | Target MAC Addr. <u>308</u> |
| | |

Fig. 5B-1

312

| | |
|------------------|------------------------------|
| | Lookup Table |
| Connection Index | |
| | |
| | |
| | Target-PIC Connection 2 |
| 8 | PIC- MAC Addr. <u>212</u> |
| | |

Fig. 5B-2

314

| | |
|------------------|------------------------------|
| | Lookup Table |
| Connection Index | |
| | |
| | Target-PIC Connection 4 |
| 6 | PIC- MAC Addr. <u>212</u> |
| | |

Fig. 5B-3

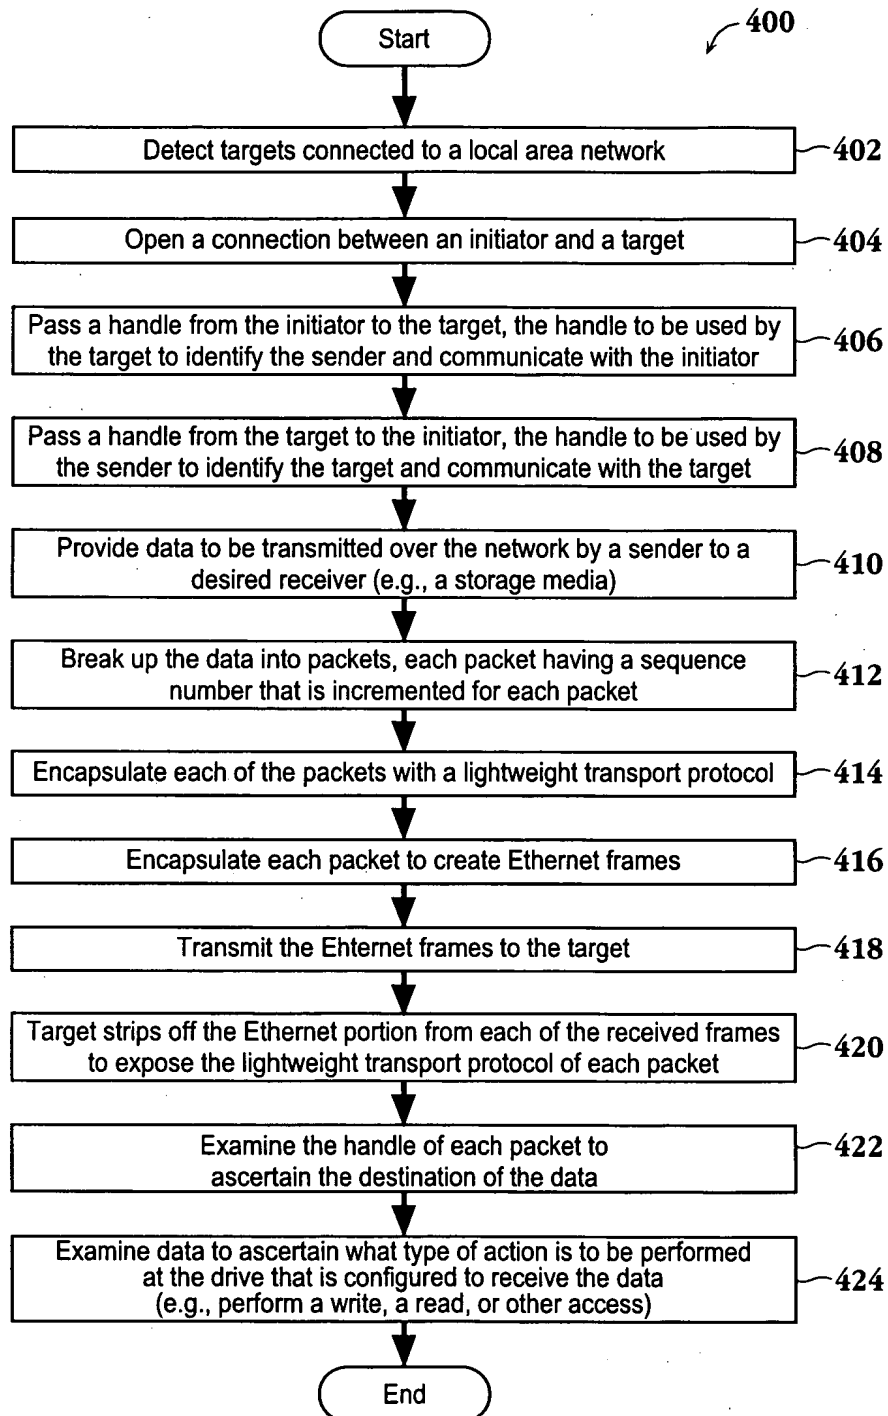


Fig. 6

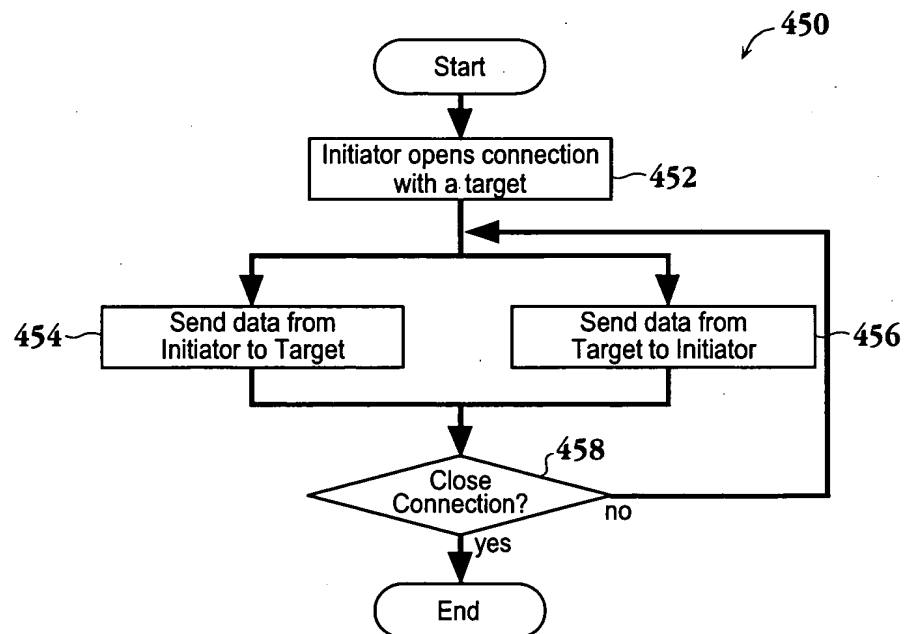


Fig. 7